

EZ-ZONE® RM RAIL MOUNT CONTROLLER

EZ-ZONE® RM Rail Mount Controller Integrates Multiple Controller Functions Saving Time, Space and Cost

The EZ-ZONE® RM integrated multi-loop controller from Watlow® can be used as a PID temperature/process controller, an over/under limit controller or these functions can be combined into an integrated controller. Other control functions can be integrated such as high amperage power controller output which creates a complete integrated thermal loop controller all in one space-saving, DIN-rail mount integrated package.

The EZ-ZONE RM can be configured with a range of 1 to 16 modules controlling from 1 to 64 loops. Because the EZ-ZONE RM controller is single-loop scalable, you only pay for what you need – leading to exact loop count and unmatched industry flexibility.

Optional integrated controller functions that can be combined together or ordered in different quantities as desired include:

- PID control loops
- Over/under temperature limit control loops
- 10 or 15 ampere power output/heater driver options
- On-board data logging
- Current measurement input
- Sequencer start up and control function
- Programmable timer and counter functions
- Programmable math and logic options
- Multiple communication protocol options
- Mobile configuration with removable secure digital (SD) flash card

Benefits of using an integrated controller solution:

- Reduces wiring time and termination complexity compared to connecting multiple discrete products
- Improves system reliability
- Reduces termination and installation cost while also improving system reliability
- Eliminates compatibility issues often encountered with using many different discrete components and brands
- Reduces troubleshooting time and downtime costs since the system can specifically identify to the operator if there are any problems with a sensor, controller, solid state relay (SSR) power output or heater load
- Thermal solution is complete – saving engineering time and labor costs while speeding up project times



Features and Benefits

1 to 64 PID loop controller

- Saves money because only needed loops are purchased
- Allows a common controller platform across many design applications since both loop count and additional outputs can be ordered in increments of one

Advanced PID control algorithm

- Offers TRU-TUNE®+ adaptive control to provide tighter control for demanding applications
- Enables auto-tune for fast, efficient start up

Current monitoring for entire system

- Detects condition of up to 18 individual outputs and loads through the use of three current transformer inputs (outputs are inside EZ-ZONE RM expansion module)
- Saves cost on extra current transformers, panel space, wiring and mounting labor
- Provides affordable, easy-to-use diagnostics

Communication capabilities

- Provides a range of protocol choices including Modbus® RTU, EtherNet/IP™, Modbus® TCP, DeviceNet™ and Profi®Bus (future option)

SPLIT-RAIL™ control

- Allows mounting of low voltage and high voltage modules in different cabinets with individual modules functioning together even if physically split apart
- Minimizes the length and cost of wire runs and improves system reliability by accommodating inputs located closer to sensors and outputs closer to loads

AUTO CLONE™

- Saves time by reducing complexity and automatically configures a new module with the same parameter settings as the replaced module

SENSOR GUARD™

- Prevents customer system shutdown and product scrap or loss by allowing a sensor to be chosen to backup another sensor in case of primary sensor failure



ISO 9001



Registered Company
Winona, Minnesota USA

WIN-EZRM-1008

Additional Key Functions Available

- Configuration communication port (standard bus)
- Removable modules and connectors
- Ring lug or straight angle terminal options
- Profile ramp soak with 400 total steps
- Retransmit and remote set point input virtually inside controller avoiding costs for input/output hardware
- User configuration settings can be stored and recalled
- Class 1, Div. 2 option
- Thermistor input
- Elevated operating range of 32 to 150°F (0 to 65°C)
- UL® listed, CSA, CE, RoHS, W.E.E.E. FM, SEMI F47-0200, Class 1, Div. 2 rating on selected models

Common Specifications

Line Voltage/Power

- 20.4 to 30.8V_{rms}(ac/dc), 50/60Hz ±5%
- Any external power supply used should comply with a Class 2 or SELV rating (see specific module specification listing for max. VA power consumption)
- Data retention upon power failure via nonvolatile memory
- Compliant with Semi F47-0200, Figure R1-1 voltage sag requirements

Environment

- 0 to 149°F (-18 to 65°C) operating temperature
- -40 to 185°F (-40 to 85°C) storage temperature
- 0 to 90% RH, non-condensing

Agency Approvals

- UL®/EN 61010 Listed, C-UL® C22.2 #61010ANSI/ISA 12.12.01-2007 Class 1, Div. 2-Group A, B, C, D temperature code T4 (optional)
- UL® 1604 Class 1, Div. 2 (optional)
- EN 60529 IP20
- UL® 50, NEMA 4X, EN 60529 IP66; ¼ DIN remote user interface (RUI)
- CSA 610110 CE
- RoHS by design, W.E.E.E.
- FM Class 3545 on limit control versions

Serial Communications

- All modules ship with standard bus protocol for configuration and communication connection to all other EZ-ZONE products

User Interface

- Seven segment LED, programmed via push button switch
- Communication activity, 2 LEDs
- Error condition of each loop, 4 LEDs
- Output status indication, 16 LEDs

Maximum System Configuration

- One access module plus up to 16 additional control or expansion modules (any combination), up to 64 loops

Mounting


- DIN-rail specification EN50022, 1.38 x 0.30 in. (35 x 7.5 mm)
- Can be DIN-rail mounted or chassis mounted with customer supplied screws

Wiring Termination—Touch-Safe Terminals

- Right angle and front screw type terminal blocks (slots A, B, D, E)
- Input, power and controller output terminals, touch safe removable 12 to 30 AWG


- Wire strip length 0.30 in. (7.6 mm)
- Torque 7.0 lb.-in. (0.8Nm), front terminal block 4.5 lb.-in. (0.5Nm)

Dimensional Drawings

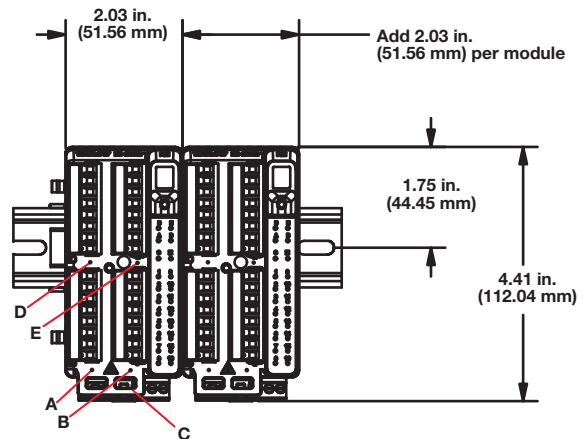


Connector	Connector Depth in. (mm)
Standard	5.8 (148)
Straight	6.1 (155)
Ring Terminal	6.5 (166)


Standard Connectors

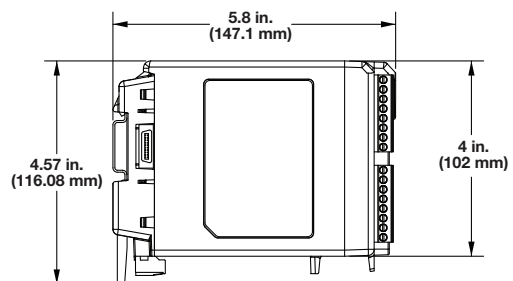

Straight Connectors



Ring Terminal Connectors




Optional Accessories

Basic remote user interface (RUI)

- 1/6 DIN
- Dual 4 digit, 7-segment LED displays
- Keys: advance, infinity, up, down keys, plus an EZ-KEY programmable function key
- Typical display update rate 1Hz



Basic RUI



Front View

Power Supplies

- AC/DC power supply converter 90-264V~(ac) to 24V=(dc) volts.
- P/N 0847-0299-0000 – 31 W
- P/N 0847-0300-0000 - 60 W
- P/N 0847-0301-0000 – 91 W

EZ-ZONE RM Product Documentation

- Users manual – electronic CD P/N 0601-0001-0000
- User manual – printed hard copy P/N 0600-0061-0000
- Controller support tools - electronic CD P/N 0500-3080-0000

Control Module Specifications

Line Voltage/Power

- Power consumption: 7 W, 14VA
- Any external power supply used should comply with a Class 2 or SELV rating

Controller

- User selectable heat/cool, on-off, P, PI, PD, PID or alarm action, not valid for limit controllers

Process PID or Over-temperature Limit Mode Options

- Auto-tune with TRU-TUNE+ adaptive control
- Control sampling rates: input = 10Hz, output = 10Hz (non-divisional)

Serial Communications

- Isolated communications
- All modules ship with standard bus protocol for configuration and communication connection to all other EZ-ZONE controllers

Additional Communication Options

- EIA 485, Modbus® RTU

Profile Ramp and Soak

- 25 profiles, 15 sub-routines and 400 total steps
- Option for battery back up and real time clock via the access module

Accuracy

- Calibration ambient temperature @ 77°F ±5°F (25°C ±3°C)
- Accuracy span: 1000°F (540°C) min.
- Temperature stability: ±0.1°F/°F (±0.1°C/°C) rise in ambient max.

Universal Input

- Thermocouple, grounded or ungrounded sensors
- >20MΩ input impedance
- Max. of 20Ω source resistance
- RTD 2- or 3-wire, platinum, 100Ω and 1000Ω @ 32°F (0°C) calibration to DIN curve (0.00385Ω/Ω/°C)
- Process, 0-20mA @100Ω, or 0-10V=(dc) @ 20kΩ input impedance; scalable, 0-50mV
- Potentiometer: 0 to 1,200Ω
- Inverse scaling
- Current: input range is 0 to 50mA, 100Ω input impedance
- Response time: 1 second max., accuracy ±1mA typical

Thermistor Input

- 0 to 40KΩ, 0 to 20KΩ, 0 to 10KΩ, 0 to 5KΩ
- 2.252KΩ and 10KΩ base at 77°F (25°C)
- Linearization curves built in

Digital Input

- Update rate 10Hz
- DC voltage
- Max. input 36V at 3mA
- Min. high state 3V at 0.25mA
- Max. low state 2V

Dry Contact

- Update rate 10Hz
- Min. open resistance 10KΩ
- Max. closed resistance 50Ω
- Max. short circuit 13mA

Single Input Current Measurement Input

- Accepts 0-50mA signal (user programmable range)
- Displayed operating range and resolution can be scaled and are user programmable

Output Hardware

- Switched dc only, 22 to 32V=(dc) @ 10mA. Pertains to outputs ordered as numbers 1, 3, 5 or 7
- Universal switched dc and/or open collector pertains to outputs ordered as numbers 2, 4, 6 or 8
 - Switched dc, output voltage 20V=(dc) or 12V=(dc) user selectable, max. supply current source 40mA at 20V=(dc) and 80mA at 12V=(dc)
 - Open collector, switched voltage max.: 32V=(dc), max. switched current per output: 1.5A, max. switched current for all 6 outputs combined: 8A
- SSR, Form A, 1A at 50°F (10°C) to 0.5A at 149°F (65°C), 0.5A @ 24V~(ac) min., 264V~(ac) max., opto-isolated, without contact suppression
- Electromechanical relay, Form C, 5A, 24 to 240V~(ac) or 30V=(dc) max., resistive load, 100,000 cycles at rated load, requires a min. load of 20mA at 24V, 125VA pilot duty
- Electromechanical relay, Form A, 5A, 24 to 240V~(ac) or 30V=(dc) max., resistive load, 100,000 cycles at rated load, requires a min. load of 20mA at 24V, 125VA pilot duty
- NO-ARC relay, Form A, 15A @ 122°F (50°C), 85 to 264V~(ac), no V=(dc), resistive load, 2 million cycles at rated load
- Universal process/retransmit, output range selectable:
 - 0 to 10V=(dc) into a min. 1,000Ω load
 - 0 to 20mA into max. 800Ω load

Accuracy Range

Input Type	Max. Error @ 77°F (25°C)	Accuracy Range Low	Accuracy Range High	Units
J	±1.75	0	750	Deg. C
K	±2.45	-200	1250	Deg. C
T (0 to 350)	±1.55	0	350	Deg. C
T (-200 to 0)	±1.55	-200	0	Deg. C
N	±2.25	0	1250	Deg. C
E	±2.10	-200	900	Deg. C
R	±3.9	0	1450	Deg. C
S	±3.9	0	1450	Deg. C
B	±2.66	870	1700	Deg. C
C	±3.32	0	2315	Deg. C
D	±3.32	0	2315	Deg. C
F (PTII)	±2.34	0	1343	Deg. C
RTD, 100Ω	±2.00	-200	800	Deg. C
RTD, 1000Ω	±2.00	-200	800	Deg. C
mV	±0.05	0	50	mV
Volts	±0.01	0	10	Volts
mA=(dc)	±0.02	0	20	mAmps (dc)
mA~(ac)	±5	-50	50	mAmps (ac)
Potentiometer, 1K range	±1	0	1000	Ohms
Resistance, 5K range	±5	0	5000	Ohms
Resistance, 10K range	±10	0	10000	Ohms
Resistance, 20K range	±20	0	20000	Ohms
Resistance, 40K range	±40	0	40000	Ohms

Programmable Application Blocks

Actions (events) - 8 total

Alarms - 8 total

Control Loop - 4 total

Compare - 4 total

- Off, greater than, less than, equal, not equal, greater than or equal, less than or equal

Counters - 4 total

- Counts up or down loads, predetermined value on load signal. Output is active when count value equals predetermined target value

Logic - 4 total

- Off, and, nand, or, nor, equal, not equal, latch

Linearization - 4 total

- Interpolated or stepped relationship

Math - 8 total

- Off, average, process scale, deviation scale, differential (subtraction), ratio (divide), add, multiply, absolute difference, min., max., square root, sample and hold

Process Value - 4 total

- Off, sensor back-up, average, crossover, wet/dry bulb, switch over, differential (subtraction), ratio (divide), add, multiply, absolute difference, min., max., square root

Special Output Function - 4 total

- Compressor – turns on-off compressor for one or two loops (cool and dehumidify with single compressor)
- Motorized Valve – turns on-off motor open/closed outputs to cause valve to represent desired power level
- Sequencer – turns on-off up to four outputs to distribute a single power across all outputs with linear and progressive load wearing

Timers - 4 total

- On Pulse – produces output of fixed time on active edge of timer run signal
- Delay – output is a delayed start of timer run, off at same time
- One Shot – oven timer
- Retentive – measures timer run signal, output on when accumulated time exceeds target

Variable - 8 total

- User value for digital or analog variable

Expansion Module Specifications

Line Voltage/Power

- Power consumption: 7 W, 14VA
- Any external power supply used should comply with a Class 2 or SELV rating

Serial Communications

- All modules ship with standard bus protocol for configuration and communication connection to all other EZ-ZONE products

Wiring Termination—Touch Safe Terminals

- Right angle and front screw type terminal blocks (slots A, B, D, E)
 - Input, power and controller output terminals, touch safe removable 12 to 30 AWG
 - Wire strip length 0.30 in. (7.6 mm)
 - Torque 7.0 lb.-in. (0.8Nm)
- Front screw terminal block
 - Wire strip length 0.30 in. (7.6 mm)
 - Torque 4.5 lb.-in. (0.5Nm)
- Ring lug terminal block
 - Wire strip length 0.30 in. (7.6 mm)
 - Torque 10.0 lb.-in. (1.13Nm)

Digital Input

- Update rate 10Hz
- DC voltage
- Max. input 36V at 3mA
- Min. high state 3V at 0.25mA
- Max. low state 2V

Dry Contact

- Min. open resistance 100KΩ
- Max. closed resistance 50Ω

Quad Input for External Current Transformers (future option, contact factory)

- Accepts 0-50mA signal (user programmable range)
- Displayed operating range and resolution can be scaled and are user programmable
- Used for entire three-phase system for all outputs ordered within the expansion module
- Used as four independent (single-phase) current transformer inputs
- Cannot mix single- phase and three-phase together for simultaneous current measurement
- Diagnostic measurement triggered by either event input condition or time interval – customer programmable

Profile Ramp and Soak

- 25 profiles, 15 sub-routines and 400 total steps via control module

Output Hardware (6 digital inputs/outputs)

Digital Output

- Update rate 10Hz
- Switched dc
- Output voltage 20V=dc or 12V=dc, user selectable
- Max. supply current source 40mA at 20V=dc and 80mA at 12V=dc

Open Collector

- Switched voltage max. - 32V=dc
- Max. switched current per output - 2.5A
- Max. switched current for all six outputs combined - 10A
- SSR, Form A, 0.5A @ 24V~(ac) min., 264V~(ac) max., opto-isolated, without contact suppression

Dual Solid State Relay

- Two SSR board option, Form A, 10A max. each SSRs combined @ 24V~(ac) min., 264V~(ac) max., opto-isolated, without contact suppression, max. resistive load 10A per output at 240V~(ac), max. 20A per card at 122°F (50°C), max. 12A per card at 149°F (65°C)

Quad

- Four electro mechanical relays, Form A, 5A, 24 to 240V~(ac) or 30V=(dc) max., resistive load, 100,000 cycles at rated load. Requires a min. load of 20mA at 24V, 125VA pilot duty

Programmable Application Blocks

Actions (events) - 8 total

Alarms - 8 total

Control Loop - 4 total

Compare - 4 total

- Off, greater than, less than, equal, not equal, greater than or equal, less than or equal

Counters - 4 total

- Counts up or down loads, predetermined value on load signal, output is active when count value equals predetermined target value

Logic - 4 total

- Off, and, nand, or, nor, equal, not equal, latch

Linearization - 4 total

- Interpolated or stepped relationship

Math - 8 total

- Off, average, process scale, deviation scale, differential (subtraction), ratio (divide), add, multiply, absolute difference, min., max., square root, sample and hold

Process Value - 4 total

- Off, sensor back-up, average, crossover, wet/dry bulb, switch over, differential (subtraction), ratio (divide), add, multiply, absolute difference, min., max., square root

Special Output Function - 4 total

- Compressor - turns on-off compressor for one or two loops (cool and dehumidify with single compressor)
- Motorized Valve - turns on-off motor open/closed outputs to cause valve to represent desired power level
- Sequencer - turns on-off up to four outputs to distribute a single power across all outputs with linear and progressive load wearing

Timers - 4 total

- On Pulse - produces output of fixed time on active edge of timer run signal
- Delay - output is a delayed start of timer run, off at same time
- One Shot - oven timer
- Retentive - measures timer run signal, output on when accumulated time exceeds target

Variable - 8 total

- User value for digital or analog variable

Access Module Specifications

Line Voltage/Power

- Power consumption: 4 W, 9VA
- Any external power supply used should comply with a Class 2 or SELV rating

Serial Communications

- Isolated communications
- All modules ship with standard bus protocol for configuration and communication connection to all other EZ-ZONE products

Additional Communication Options

- EIA 232/485, Modbus® RTU
- EtherNet/IP™, Modbus® TCP, 10 BASE-T/100 BASE-TX
- DeviceNet™
- Profi®Bus DP (Future option, contact factory)
- USB controller recognized as a device

USB

- USB 1.1 device only
- Mini USB connector type
- Recognized as a mass storage device

Real Time Clock with Battery Back-up

- Accuracy (typical): +/- 30ppm at 77°F (25°C)
- +30/-100ppm -4 to 149°F (-20 to 65°C)
- Battery type and typical lifetime rating: 10 years at 77°F (25°C)
- Lithium battery used, recycle properly

Datalogging

- File storage on-board module
- Common separated value (CSV) file type
- Export files via removable SD micro memory card or via USB communications port

Memory Card

- Removable SD micro physical size
- 2G SD memory card provided, accepts other storage space amounts
- -4 to 185°F (-20 to 85°C) ambient rating, non-volatile memory
- Information access to configuration files, ability to store module auto-configuration settings and datalog files if options have been ordered

Auto-configuration File Back-up

- Limited memory can support up to four modules
- Memory is fixed on board
- Unlimited memory- can support up to 16 modules
- Memory utilizes removable SD micro card option

Note: All module parameters are backed up in memory except for USER SET 1 and USER SET 2 parameter settings.

EZ-ZONE Rail Mount Control Module Ordering Information

Control module operates off of 24 to 28V=(dc) power supply, communication port for configuration with EZ-ZONE configurator and PC.

Code Number

EZ-ZONE Rail Mount	Control Module	Input 1 Primary Function	Output 1 and 2 Hardware Options	Input 2	Output 3 and 4 Hardware Options	Input 3	Output 5 and 6 Hardware Options	Input 4	Output 7 and 8 Hardware Options	Connector Style	Enhanced Options	Additional Options	Reference RME module drawing.
RM	C												

Input 1	
1	= Control with universal input
2	= Control with thermistor input
3	= Ramp/Soak control with universal input (R/S applies to all loops in module)
4	= Ramp/Soak control with thermistor input (R/S applies to all loops in module)
5	= Limit with universal input (only valid Output 1 and 2, options will be B, F, L)
6	= Limit with thermistor input (only valid Output 1 and 2, options will be B, F, L)
7	= Current transformer input (not valid Output 1 and 2, options are N, P, R, S)
9	= Custom

Output 1 and 2 Hardware Options		
Output 1	Output 2	
A	= None	None
B	= None	Mechanical relay 5A, Form A
U	= Switched dc/open collector	None
D	= Switched dc/open collector	NO-ARC 15A power control
E	= Switched dc/open collector	Switched dc
F	= Switched dc/open collector	Mechanical relay 5A, Form A
G	= Switched dc/open collector	SSR Form A, 0.5A
H	= Mechanical relay 5A, Form C	None
J	= Mechanical relay 5A, Form C	NO-ARC 15A power control
K	= Mechanical relay 5A, Form C	Switched dc
L	= Mechanical relay 5A, Form C	Mechanical relay 5A, Form A
M	= Mechanical relay 5A, Form C	SSR Form A, 0.5A
N	= Universal process	None
P	= Universal process	Switched dc
R	= Universal process	Mechanical relay 5A, Form A
S	= Universal process	SSR Form A, 0.5A
T	= None	SSR Form A, 0.5A
Y	= SSR Form A, 0.5A	NO-ARC 15A power control
Z	= SSR Form A, 0.5A	SSR Form A, 0.5A

Input 2	
A	= None
1	= Control with universal input
2	= Control with thermistor input
5	= Limit with universal input (only valid Output 3 and 4, options will be B, F, L)
6	= Limit with thermistor input (only valid Output 3 and 4, options will be B, F, L)
7	= Current transformer input (not valid Output 3 and 4, options are N, P, R, S)

Output 3 and 4 Hardware Options		
Output 3	Output 4	
A	= None	None
B	= None	Mechanical relay 5A, Form A
U	= Switched dc/open collector	None
D	= Switched dc/open collector	NO-ARC 15A power control
E	= Switched dc/open collector	Switched dc
F	= Switched dc/open collector	Mechanical relay 5A, Form A
G	= Switched dc/open collector	SSR Form A, 0.5A
H	= Mechanical relay 5A, Form C	None
J	= Mechanical relay 5A, Form C	NO-ARC 15A power control
K	= Mechanical relay 5A, Form C	Switched dc
L	= Mechanical relay 5A, Form C	Mechanical relay 5A, Form A
M	= Mechanical relay 5A, Form C	SSR Form A, 0.5A
N	= Universal process	None
P	= Universal process	Switched dc
R	= Universal process	Mechanical relay 5A, Form A
S	= Universal process	SSR Form A, 0.5A
T	= None	SSR Form A, 0.5A
Y	= SSR Form A, 0.5A	NO-ARC 15A power control
Z	= SSR Form A, 0.5A	SSR Form A, 0.5A

Input 3	
A	= None
1	= Control with universal input
2	= Control with thermistor input
5	= Limit with universal input (only valid Output 5 and 6, options will be B, F, L)
6	= Limit with thermistor input (only valid Output 5 and 6, options will be B, F, L)
7	= Current transformer input (not valid Output 5 and 6, options are N, P, R, S)

Output 5 and 6 Hardware Options		
Output 5	Output 6	
A	= None	None
B	= None	Mechanical relay 5A, Form A
U	= Switched dc/open collector	None
D	= Switched dc/open collector	NO-ARC 15A power control
E	= Switched dc/open collector	Switched dc
F	= Switched dc/open collector	Mechanical relay 5A, Form A
G	= Switched dc/open collector	SSR Form A, 0.5A
H	= Mechanical relay 5A, Form C	None
J	= Mechanical relay 5A, Form C	NO-ARC 15A power control
K	= Mechanical relay 5A, Form C	Switched dc
L	= Mechanical relay 5A, Form C	Mechanical relay 5A, Form A
M	= Mechanical relay 5A, Form C	SSR Form A, 0.5A
N	= Universal process	None
P	= Universal process	Switched dc
R	= Universal process	Mechanical relay 5A, Form A
S	= Universal process	SSR Form A, 0.5A
T	= None	SSR Form A, 0.5A
Y	= SSR Form A, 0.5A	NO-ARC 15A power control
Z	= SSR Form A, 0.5A	SSR Form A, 0.5A

Input 4	
A	= None
1	= Control with universal input
2	= Control with thermistor input
5	= Limit with universal input (only valid Output 7 and 8, options will be B, F, L)
6	= Limit with thermistor input (only valid Output 7 and 8, options will be B, F, L)
7	= Current transformer input (not valid Output 7 and 8, options are N, P, R, S)

Output 7 and 8 Hardware Options		
Output 7	Output 8	
A	= None	None
B	= None	Mechanical relay 5A, Form A
U	= Switched dc/open collector	None
D	= Switched dc/open collector	NO-ARC 15A power control
E	= Switched dc/open collector	Switched dc
F	= Switched dc/open collector	Mechanical relay 5A, Form A
G	= Switched dc/open collector	SSR Form A, 0.5A
H	= Mechanical relay 5A, Form C	None
J	= Mechanical relay 5A, Form C	NO-ARC 15A power control
K	= Mechanical relay 5A, Form C	Switched dc
L	= Mechanical relay 5A, Form C	Mechanical relay 5A, Form A
M	= Mechanical relay 5A, Form C	SSR Form A, 0.5A
N	= Universal process	None
P	= Universal process	Switched dc
R	= Universal process	Mechanical relay 5A, Form A
S	= Universal process	SSR Form A, 0.5A
T	= None	SSR Form A, 0.5A
Y	= SSR Form A, 0.5A	NO-ARC 15A power control
Z	= SSR Form A, 0.5A	SSR Form A, 0.5A
C	= 6 digital inputs/outputs (valid option only if Input 4 selection = A)	

Connector Style	
A	= Right angle screw connector (standard)
F	= Front screw connector

Enhanced Options	
A	= Standard bus
1	= Standard bus and Modbus® RTU 485

Additional Options	
Firmware, Overlays, Parameter Settings	
AA	= Standard
AB	= Replacement connectors hardware only for the entered model number. Additional cost for the model can be disregarded as you are only ordering replacement connectors.
12	= Class 1, Div. 2 (not available with integrated limit controller or mechanical relay options)
XX	= Custom

EZ-ZONE Rail Mount Expansion Module Ordering Information

Expansion module operates off of 24 to 28V=(dc) power supply, communication port for configuration with EZ-ZONE configurator and PC.

Code Number

EZ-ZONE Rail Mount	Expansion Module	Connector Style/ Custom Product	Slot A	Slot B	Slot D	Slot E	Future Options	Additional Options
RM	E						AA	

Connector Style/Custom Product

A = Right angle screw connector (standard)
 F = Front screw connector
 R = Ring lug connector (if ordered, then slots B and E must be = A)
 S = Custom

Slot A

A = None
 C = 6 digital I/O
 J = 4 mechanical relay 5A, Form A
 K = 2 SSRs, Form A, 10A max. each (if ordered, then slot B must be = A)

Slot B

A = None
 C = 6 Digital I/O
 J = 4 Mechanical relay 5A, Form A

Slot D

A = None
 C = 6 digital I/O
 J = 4 mechanical relay 5A, Form A
 K = 2 SSRs, Form A, 10A max. each (if ordered, then slot E must be = A)

Slot E

A = None
 C = 6 digital I/O
 T = Quad inputs for external current transformers. Can do either single phase or three phase system measurement for all hardware outputs ordered within the expansion module (future option, contact factory)

Future Options

AA = Standard

Additional Options

Firmware, Overlays, Parameter Settings

AA = Standard
 AB = Replacement connectors hardware only, for the entered model number. Additional cost for the model can be disregarded as you are only ordering replacement connectors.
 12 = Class 1, Div. 2 (not available with integrated limit controller or mechanical relay options)
 XX = Custom



RMC and RME Module

EZ-ZONE Rail Mount Access Module Ordering Information

Access module operates off of 24 to 28V=(dc) power supply, communication port for configuration with EZ-ZONE configurator and PC.

Code Number

EZ-ZONE Rail Mount	Access Module	Connector Style	Future Options	Comms. Options	Ramp/ Soak Functions	System Config. & Data Logging Options	Future Options	Additional Options
RM	A		A				AA	

Connector Style	
A	= Right angle screw connector (standard)
F	= Front screw connector
S	= Custom

Future Options	
A	= Standard

Communications Options	
A	= None
2	= Modbus® RTU 232/485
3	= EtherNet/IP™, Modbus®/TCP
5	= DeviceNet™
6	= Profi®Bus DP (future option)

Ramp/Soak Functions	
A	= None
B	= Battery back-up and real time clock for profile wait and restart

System Configuration and Data Logging Options					
Order Option	USB "Device" Communication	Limited Auto-Configuration File Back-up for Up to 4 Modules	Unlimited Auto-Configuration File Back-up for Up to 16 Modules	On-Board Data Logging	Mobile Data (2G SD Card)
A		✓			
B			✓		✓
Y	✓		✓		✓
D	✓		✓	✓	✓

USB Device: USB access to data logging files if data logging option is ordered. Stored via on-board SD memory card. PC access to product via standard bus protocol.

Auto-Configuration Back-up: Limited fixed on board memory can support backing up configuration files for a maximum of four modules. The unlimited option utilizes a SD memory card to enable configuration file back-up for up to 16 modules. Feature can be used for cloning configuration files to multiple modules or for easy field replacement to limit downtime.

Data Logging: Data log files stored on 2G SD memory card. Data files can be exported via USB communication port transfer or removing SD card into external card reader. Watlow reserves the right to ship a larger memory amount at any point in time.

Mobile Data: Transfer configuration files (and data logging files if data logging option is ordered) via removable SD memory card.

Future Options	
AA	= Standard

Additional Options	
Firmware, Overlays, Parameter Settings	
AA	= Standard
AB	= Replacement connectors hardware only, for the entered model number. Additional cost for the model can be disregarded as you are only ordering replacement connectors
12	= Class 1, Div. 2 (not available with integrated limit controller or mechanical relay options)
XX	= Custom



RMA Module

Watlow®, EZ-ZONE® and TRU-TUNE® are registered trademarks of Watlow Electric Manufacturing Company.
 SPLIT-RAIL™, AUTO CLONE™ and SENSOR GUARD™ are trademarks of Watlow Electric Manufacturing Company.
 UL® is a registered trademark of Underwriter's Laboratories, Inc.
 Modbus® is a registered trademark of Schneider Automation Incorporated.
 DeviceNet™ and EtherNet/IP™ are trademarks of Open DeviceNet Vendors Association.
 Profi®Bus is a registered trademark of Profi®Bus Nutzer Organisation eV Non-Profit Corp.
 FED REP Germany.

Your Authorized Watlow Distributor Is:

To be automatically connected to the nearest North American Technical Sales Office:

1-800-WATLOW2 • www.watlow.com • info@watlow.com

International Technical Sales Offices: Australia, +61-3-9335-6449 • China, +86-21-6106-1425 • France, +33 1 3073-2425 • Germany, +49 (0) 7253-9400-0 • Italy, +39 (0) 2 458-8841 • Japan, +81-3-3518-6630 • Korea, +82-2-2628-5770 • Malaysia, +60-3-8076-8741 • Mexico, +52 (442) 217-6235 • Singapore, +65-6773-9488 • Spain, +34 91 675 1292 • Sweden, +46 35-27-1166 • Taiwan, +886-7-288-5168 • United Kingdom, +44 (0) 115-964-0777